


Hardline

3-Piece Connector

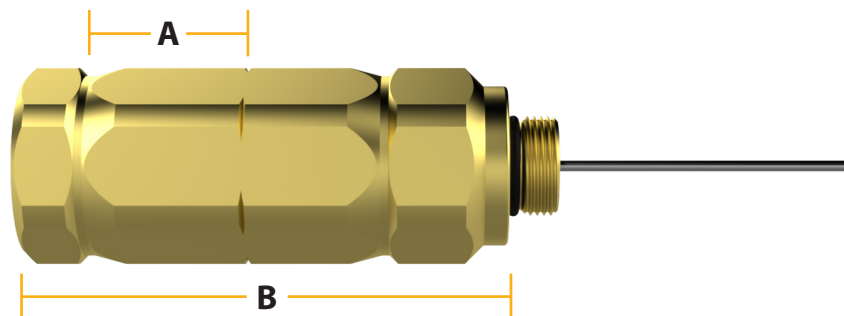

Mechanical Specifications

Connector	Hex Size	CC Trim Length (A)	Connector Length (B)	Cable Retention
	(inches)	(inches)	(inches)	(lbs)
TPP412P3	1	1	2.98	350
TPP500P3	1	1	2.98	500
TPP500MC2	1	1	3.475	500
TPP540QR	1 1/8	1	3.355	500
TPP565P3/TX	1 1/8	1	2.98	575
TPP625P3	1 1/8	1	2.98	600
TPP650MC2	1 1/8	1	3.475	600
TPP700P3/TX	1 1/4	1	2.98	650
TPP715QR	1 1/4	1	3.475	650
TPP750P3	1 1/4	1	2.98	700
TPP750MC2	1 1/4	1	3.475	700
TPP840P3/TX	1 3/8	1	2.98	750
TPP860QR	1 1/2	1 1/16	3.6	795
TPP875P3	1 3/8	1	2.98	800

Cable Dimensions

Cable Series	Nominal Center Conductor Diameter	Nominal Sheath I.D.	Nominal Sheath O.D.	Diameter Over Jacket
	(inches)	(inches)	(inches)	(inches)
412P3	0.088	0.362	0.412	0.482
500P3	0.109	0.452	0.500	0.570
500MC2	0.123	0.471	0.510	0.595
540QR	0.124	0.513	0.540	0.610
565P3/TX	0.129	0.519	0.565	0.635
625P3	0.136	0.563	0.625	0.695
650MC2	0.156	0.603	0.642	0.725
700P3/TX	0.163	0.653	0.703	0.775
715QR	0.166	0.686	0.715	0.785
750P3	0.166	0.678	0.750	0.830
750MC2	0.185	0.714	0.762	0.845
840P3/TX	0.194	0.780	0.840	0.920
860QR	0.203	0.828	0.860	0.960
875P3	0.194	0.797	0.875	0.955


Preparation & Installation Tools

- Two (2) adjustable wrenches
- Linemen's pliers or other appropriate cutters
- Appropriate cable preparation tools

Electrical Specifications

Bandwidth	0 MHz to 3 GHz
Impedance	75 Ohms (nominal)
Return Loss	-25 dB to 1.794 GHz
Insertion Loss	-0.25 dB to 1.794 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Current Rating	20 Amps (at 60 Hz continuous AC)
Operating Temperature	-40°F to + 140°F (-40°C to 60°C)

Meets or Exceeds all SCTE Specifications

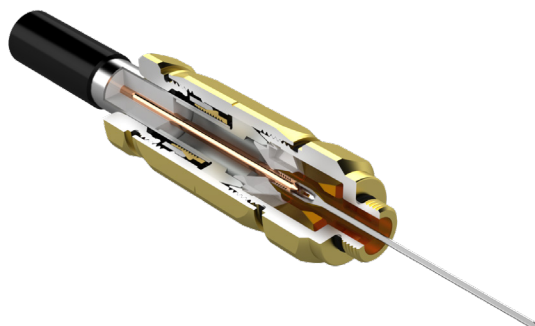

This product may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents

6176 E. Molloy Rd. East Syracuse, NY 13057 U.S.A. • customerservice@ppc-online.com • 1-800-800-6652 • +1 315-431-7200 • www.ppc-online.com