



REV.	DATE	ECR NO.	DESCRIPTION			
А	12/23/02	_	MODIFY CONTACT PIN LENGTH TO 12.25mm			
В	07/16/08	_	MODIFY CONTACT PIN LENGTH TO 12.40mm			



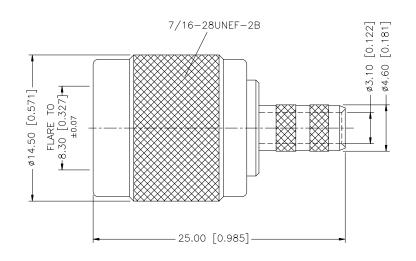





## NOTE:

- 1. CRIMPED FERRULE HEX CRIMP SIZE .213" [5.41]
- 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

Ω					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.	APPROVALS	DATE	Amphonol Connov	
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN G.R.S.	07/16/08	Amphenol Connex	
6					0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm	CHECKED		PART DESCRIPTION	
5	FERRULE	BRASS	NICKEL	1	30 - 120mm ± 0.40mm			TNC STRAIGHT CRIMP PLUG-CAPTIVE CONTACT	
4	GASKET	RUBBER	RED	1		ISSUED			
3	INSULATOR	DELRIN	NATURAL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	SHEET 1 OF 1		(FOR RG-58/U CABLE)	
2	CONTACT PIN	BRASS	GOLD	1	$.020315 = \pm 0.007$ "	1 01 1	PART NO.		
1	SHELL/BODY	HELL/BODY BRASS NICKEL 1 $315 - 1.180 = \pm 0.015$ " $1.180 - 4.724 = \pm 0.020$ "				122108			
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE		04.00 DW0	DWG. NO. 122108.DWG REV. B SIZE A SCALE NA	
	DESCRIPTION				DO NOT SCALE DRAWING	C:/122/122108.DWG			

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Amphenol}}{\frac{122108}{}}$