

SBA 202

Shielded Multiband mast-heads Preamplifiers

For individual installations. With an active UHF input medium / low gain and passive VHF input. DC passing and rejection of GSM frequencies.



GSM frequency rejection filter



ON/OFF switch for +24 VDC passing



Individual installations





Very low operative noise figure



Interstage variable attenuator



Application example

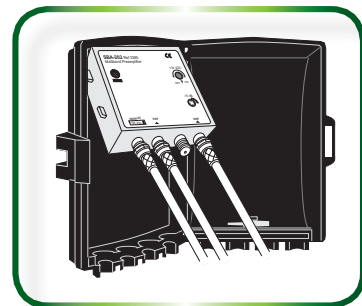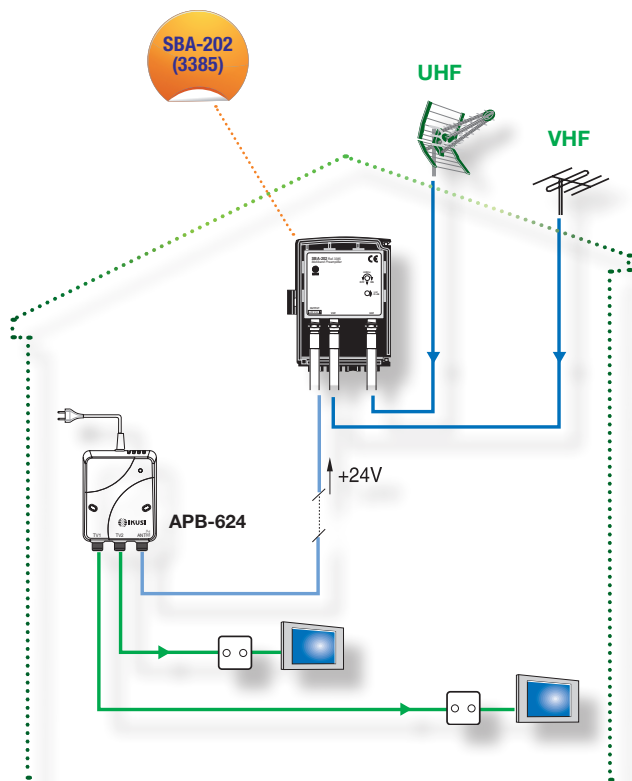

Removing the inner box for easy connections

Main Features

Model	SBA-202		
Ref.	3385		
Inputs RF	1 VHF	1 UHF	
Frequency range	MHz	45 - 240	470 - 862
Nominal gain	dB	-1	25
Gain adjustment	dB	—	0 to 18
Response flatness	dB	± 1	± 1.5
Output	1		
Output level (DIN-B, -60dB)	dBμV	—	105
Noise figure	dB	—	≤ 2
Input/output return loss	dB	> 6	
Power supply	V _{dc}	+24	
Consumption	mA	40	
Power connector	Through output connector Switchable passing path to the UHF input		
Operating temperature	°C	-10 ... +55	
Dimensions	mm	96 x 125 x 46	

IKUSI

SEDE CENTRAL

IKUSI - Ángel Iglesias S.A. · Pº Miramón, 170 · 20009 San Sebastián · SPAIN
Tel.: +34 943 44 88 00 · Fax: +34 943 44 88 20 · television@ikusi.com · www.ikusi.com

