
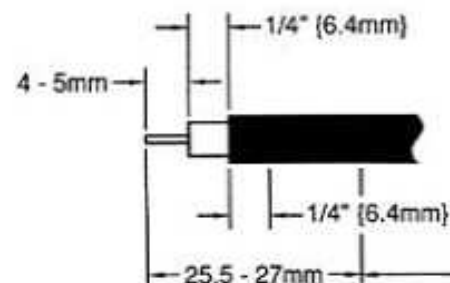
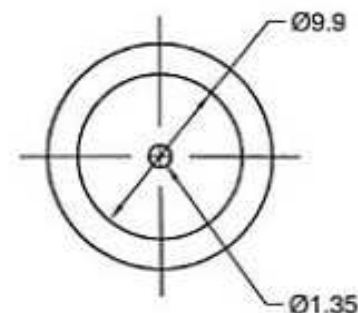
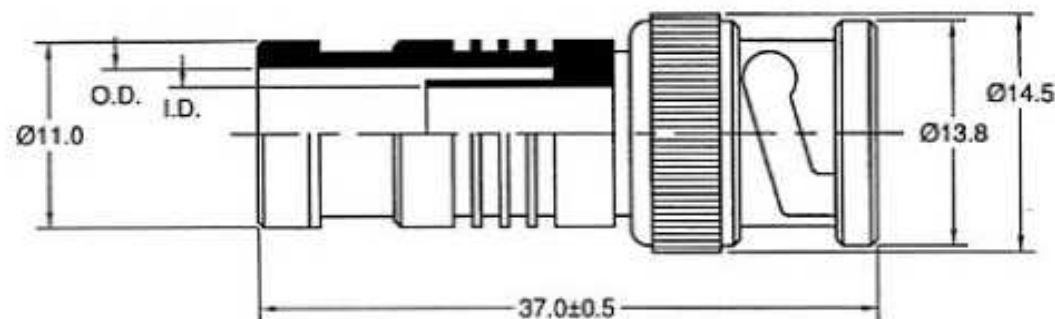


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



THE LENGTH INSERTED INTO
CONNECTOR, BEFORE CRIMP.

NOTE: ROTATE TO "SMOOTH" FOIL.

RECOMMENDED CABLE
STRIPPING DIMENSIONS

NOTE:
FOLD EXPOSED BRAID BACK OVER JACKET. LEAVE FOIL ATTACHED TO DIELECTRIC.
FOR QUAD SHIELD CABLE: FOLD OUTER BRAID BACK OVER JACKET, REMOVE OUTER FOIL,
FOLD INNER BRAID BACK OVER JACKET.

PARTS NO.	CABLE	ID	OD
BNC-7073SN	RG-6, TRI-SHIELD	4.9	7.9

BY	DATE	PacificCable.com Pacific Custom Cable Inc.	
DRAWN JN	12/10/02		
CHK'D TC	12/15/02		
APPRV			
MATERIAL	SEE NOTES	PART NO BNC-7073SN	
FINISH	SEE NOTES	UNITS mm	SHEET 1 OF 1
		SCALE NONE	