



PART NUMBER	ITEM ① NUT	ITEM ② BODY	ITEM ③ INSULATOR	ITEM ④ CONTACT
27-8200	BRASS NICKEL PLATED	BRASS NICKEL PLATED	DELTRIN	BRONZE GOLD PLATED

受控 CONTROLLED DOCUMENT				
编号 P/N	27-8200	版本 Rev	0B	日期 Rel'd Date
Mar 24,08				

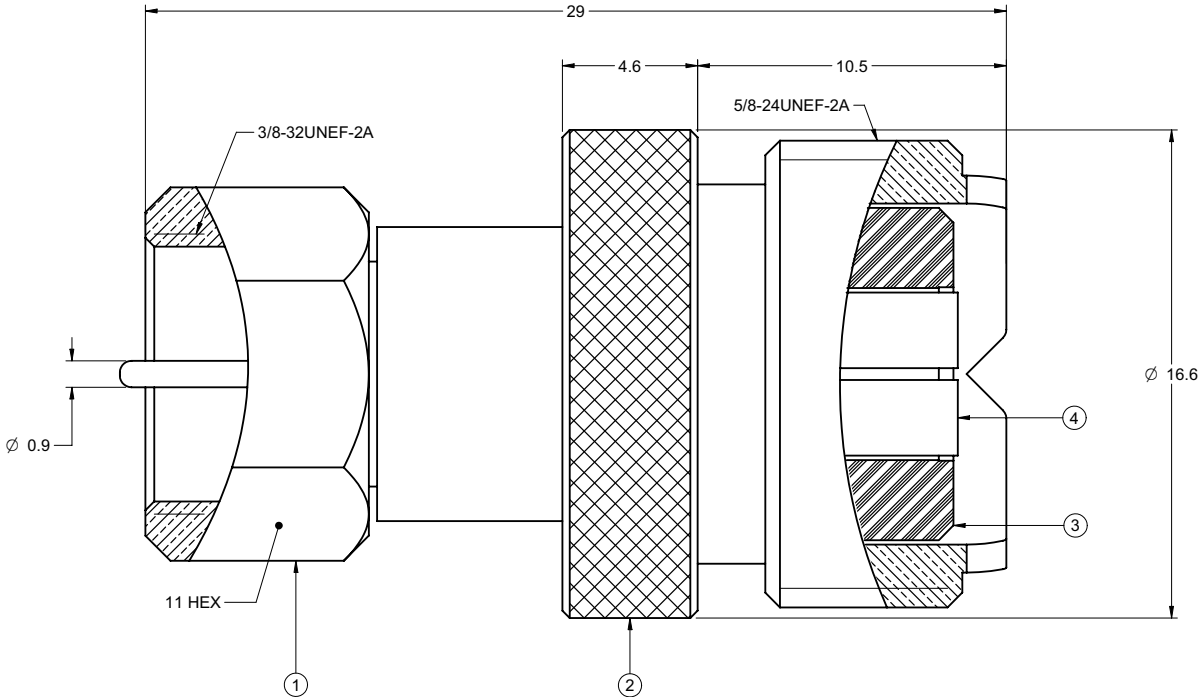

- NOTES:
- 1. ELECTRICAL SPECIFICATIONS
IMPEDANCE: NON CONSTANT
FREQUENCY RANGE: 0-500MHz
WORKING VOLTAGE: 500 Vrms MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOTALGE: 1500 vrms AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM
 - 2. MECHANICAL SPECIFICATIONS
DURABILITY: 500 CYCLES MIN
 - 3. ENVIRONMENTAL SPECIFICATIONS
RECOMMENDED TEMPERATURE RANGE: -55 °C TO +85°C
 - 4. PRODUCT SHOULD BE RoHS COMPLIANCE.
 - 5. PACKAGING REQUIREMENT FOLLOWS ENGINEERING DOCUMENT P/N 836-40200001XX

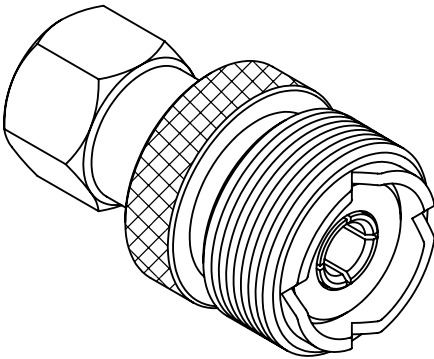

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY GARY.ZHG	DATE 12-27-06
DECIMALS	mm	CHECKED BY LINDA.WU	DATE 12-27-06
X	± 0.5	APPROVED BY THOMAS	DATE 12-27-06
X.X	± 0.2	U/M	mm
X.XX	± 0.1		
ANGLES	± 0.5°		

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

SHEET 1 OF 1		DRAWING NO. 27-8200	SIZE C
-----------------	--	------------------------	-----------

DRAWING NO. 27-8200	
REVISIONS	
RELEASE FOR QUTATION	
A	04-17-06
ADD NOTES 4 & 5	
B	12-27-06

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

EMERSON Network Power		Connectivity Solutions
TITLE UHF FEMALE TO F MALE ADAPT		