

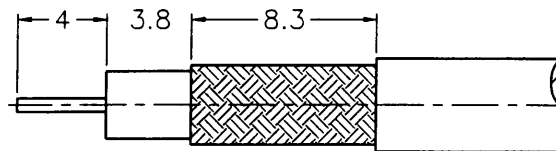
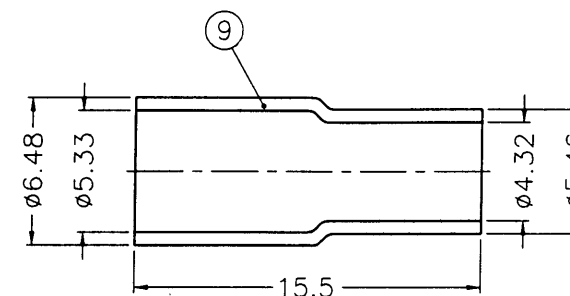


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

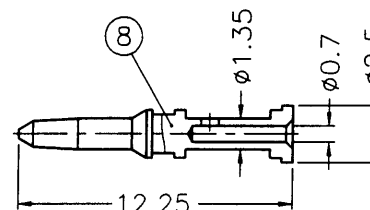

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

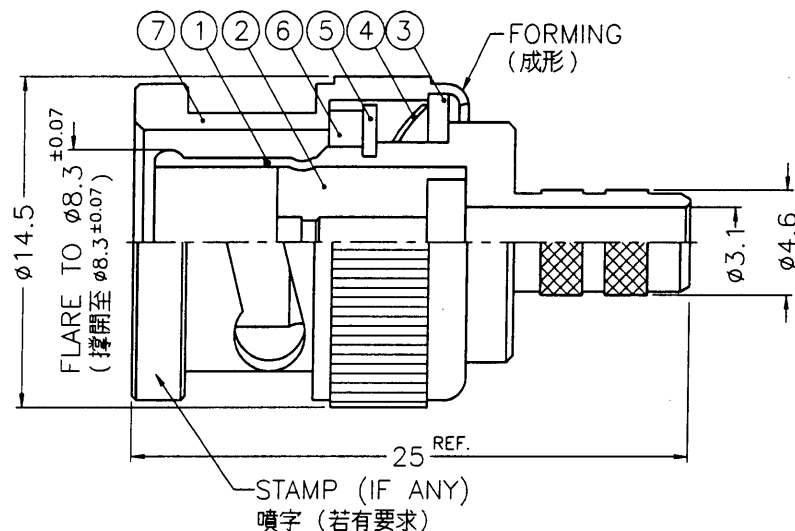

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE .043"

9	FERRULE	COPPER	NOTE 3	1	FR-648/533-546 /432X155C
8	CONTACT PIN	NOTE 1	NOTE 5	1	B1121C8-8-25/ 07
7	SHELL	NOTE 1	NOTE 3	1	B50000-1-B
6	GASKET	RUBBER	RED	1	GS-115/8X15
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
4	SPRING	SK5	NOTE 4	1	B50000-6
3	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
2	INSULATOR	NOTE 6	NATURAL	1	B50000-3T-75
1	BODY	NOTE 1	NOTE 3	1	B50000-2-46/31
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.		Amphenol – Kai Jack	
UNLESS OTHERWISE SPECIFIED TOLERANCES						TAINAN TAIWAN	
0.5-6 = ±0.2				APPROVED		TITLE	
6-30 = ±0.4				DATE		BNC CRIMP PLUG	
30-120 = ±0.6				05-11-01'		(FOR BELDEN 1855A CABLE)	
120-315 = ±1				CHECKED		DRAWING NO.	
315-1000 = ±1.6				DATE		KJ-B1121C8-NT3G-1855A-75	
1000-2000 = ±2.4				05-11-01'		FILE NO. F:\DWG\B\1121C8\1855A-75\NT3G	
SCALE	3/1	ISSUE	A				

RD&R15156