


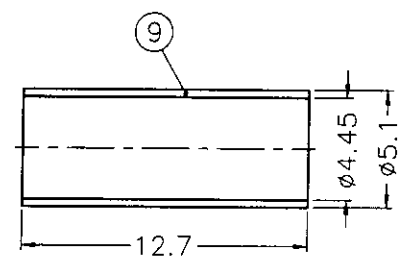


REVISIONS			
ISS	ZONE	DESCRIPTION\PER	REQUES\DATE

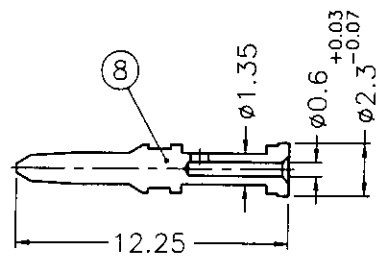

業務部

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

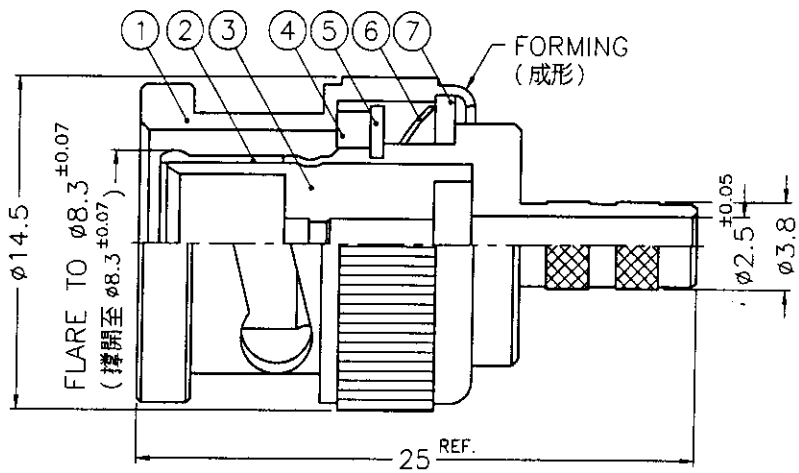

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- 1. BRASS PER QQ-B-626
 - 2. BRASS PER QQ-B-613
 - 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - 4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
 - 5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - 6. TEFLON MIL-P-19468
 - 7. JIS H 3250, C 2700

出圖
2001. 2. 08
設計部

- 1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
- 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .043"

9	FERRULE	NOTE 7	NOTE 3	1	FR-51/445X127
8	CONTACT PIN	NOTE 1	NOTE 5	1	B1121C8-8-23/06
7	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
6	SPRING	SK5	NOTE 4	1	B50000-6
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
4	GASKET	RUBBER	RED	1	GS-115/8X15
3	INSULATOR	NOTE 6	NATURAL	1	B1121A8-004-3T-75
2	BODY	NOTE 1	NOTE 3	1	B50000-2-38/25
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.		Amphenol – Kai Jack TAINAN TAIWAN	
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED <i>AOK C</i> DATE 02-07-01'		TITLE BNC CRIMP PLUG (FOR FLEX-3/75 CABLE)	
				CHECKED <i>Jaicky</i> DATE 02-07-01'		DRAWING NO. KJ-B1121A8-004-NT3G-75	
				DRAWN <i>Jaicky</i> DATE 02-07-01'		FILE NO. F:\DWG\B\1121A8\004\75\NT3G	
				SCALE 3/1		ISSUE A	