



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE



業務部

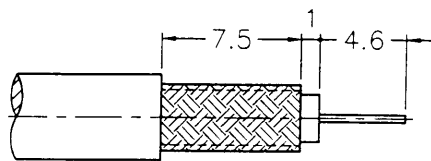




RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)
(STEP 1)



(STEP 2)

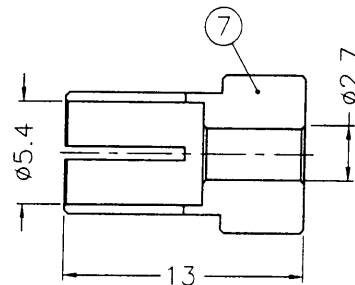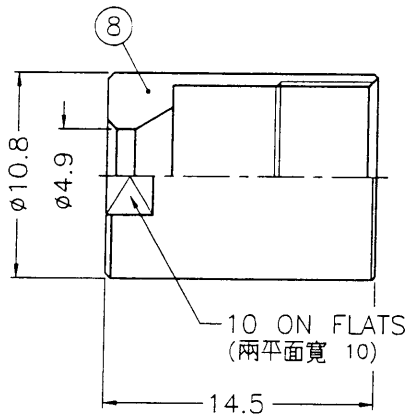

FLARE TO $\phi 6.9 \pm 0.07$
(撐開至 $\phi 6.9 \pm 0.07$)

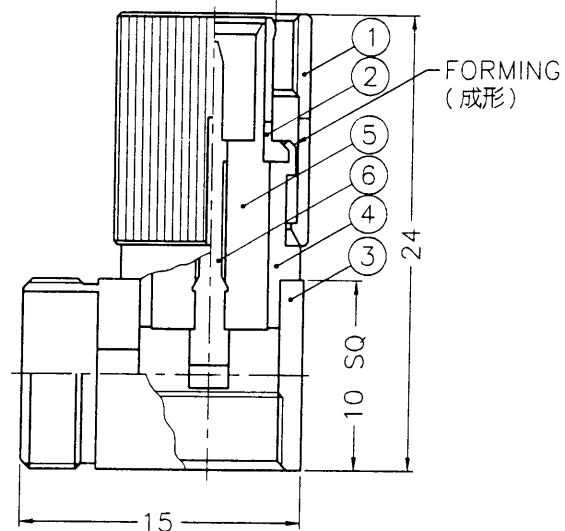

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. PHOSPHOR BRONZE PER QQ-B-750
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468

10	NUT	NOTE 1	NOTE 2	1	15687061606-5
9	INSULATOR	DELIN	NATURAL	1	15687061606-4
8	NUT	NOTE 1	NOTE 2	1	1566442A1-7-49
7	BRAID CLAMP	NOTE 1	NOTE 2	1	1566442A1-6-54/27
6	CONTACT PIN	NOTE 1	NOTE 4	1	1561112A1-6-B
5	INSULATOR	NOTE 5	NATURAL	1	1561142A1-003-5
4	BODY	NOTE 1	NOTE 2	1	1561112A1-4
3	HOUSING	NOTE 1	NOTE 2	1	1566442A1-2-27
2	OUT CONTACT	NOTE 3	NOTE 4	1	1561121G1-2
1	SHELL	NOTE 1	NOTE 2	1	1561121G1-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	
SCALE	2.5/1	ISSUE	A

PART NO.	
APPROVED	DATE 09-05-00'
CHECKED	DATE 09-05-00'
DRAWN	DATE 09-05-00'

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	1.6/5.6 R/A CLAMP PLUG (FOR 2YCCY CABLE)
DRAWING NO.	KJ-1561142A1-003-N/3GT3G-75
FILE NO.	F:\DWG\156\1142A1\003\75\N3GT3G