
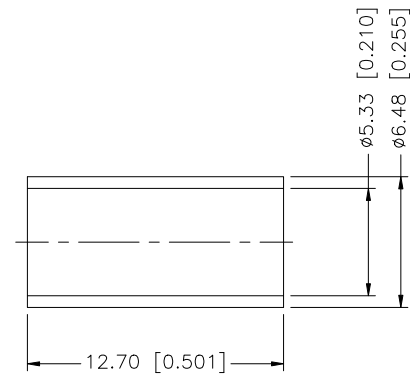
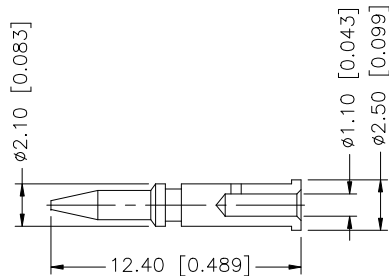
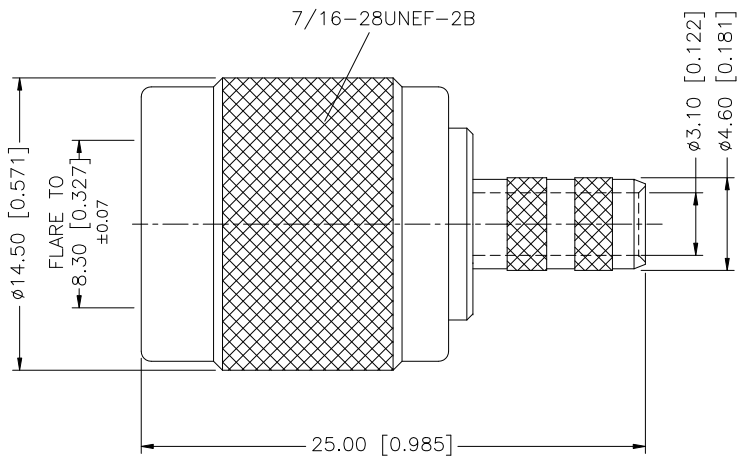


REV.	DATE	ECR NO.	DESCRIPTION
A	12/23/02	—	MODIFY CONTACT PIN LENGTH TO 12.25mm
B	07/16/08	—	MODIFY CONTACT PIN LENGTH TO 12.40mm

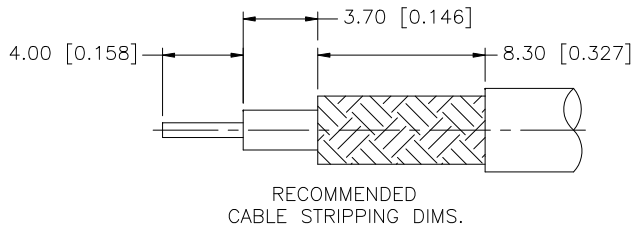

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .213" [5.41]
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex							
7						DRAWN	G.R.S.						07/16/08		
6						CHECKED									
5	FERRULE	BRASS	NICKEL	1			ISSUED		PART DESCRIPTION						
4	GASKET	RUBBER	RED	1					TNC STRAIGHT CRIMP PLUG–CAPTIVE CONTACT (FOR RG–58/U CABLE)						
3	INSULATOR	DELTRIN	NATURAL	1			SHEET	1 OF 1		PART NO.					
2	CONTACT PIN	BRASS	GOLD	1					122108						
1	SHELL/BODY	BRASS	NICKEL	1											
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/122/122108.DWG	DWG. NO.	122108.DWG	REV.	B	SIZE	A	SCALE	NA