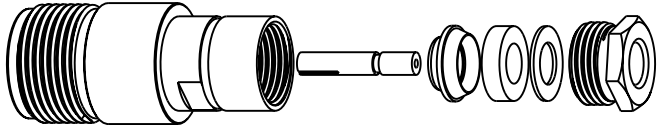
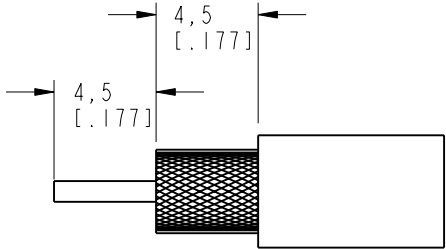
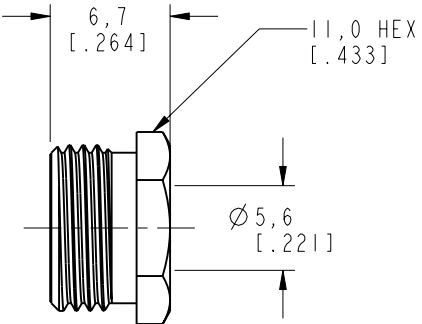
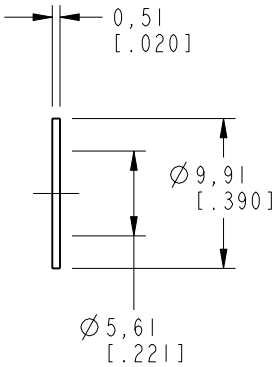
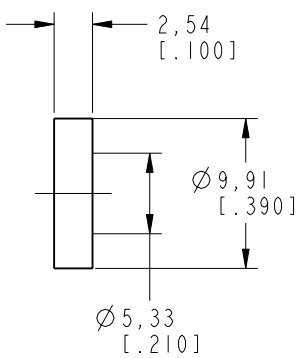

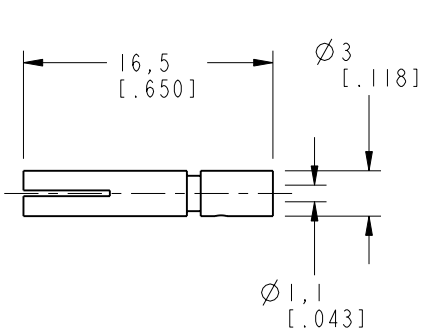
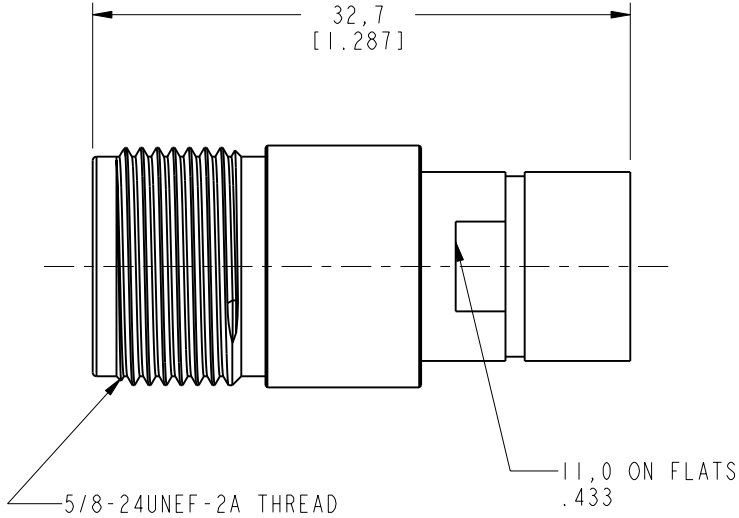


NOTES: 1. MATERIALS OF CONSTRUCTION: HOUSING, BODY, BRAID CLAMP & HEX NUT = BRASS (ASTM-B16 H02, C36000), NICKEL PLATED (.000100 MIN THICK) CONTACT PIN = PHOSPHOR BRONZE (QQ-B-750), GOLD PLATED (.000003 MIN THICK) WASHER = BRASS (QQ-B-613), NICKEL PLATED (.000100 MIN THICK) INSULATOR = PTFE PER ASTM D 1710 OR EQUIV. GASKET = SILICONE RUBBER, COLOR RED 2. CRIMPED CONTACT PIN = HEX CRIMP SIZE .100 3. ELECTRICAL: A. IMPEDANCE: 50 OHM B. FREQUENCY RANGE: DC - 11 GHz C. DIELECTRIC WITHSTANDING VOLTAGE: 2,500 VRMS, MIN. 4. MECHANICAL: A. TEMPERATURE RANGE: -65° C TO +165° C 5. PACKAGING: A. QUANTITY: SINGLE PACK B. MARKING: BAG TO BE MARKED "AMPHENOL, 35025-RFX, AND DATE CODE"	35025-RFX		REVISIONS				
	DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR	
	THIRD ANGLE PROJ. 	--	RELEASE TO MFG.	-----	-----	----	
		B	SEE SHEET 1	10/23/03	44666	CPM	
 SCALE 1.000							
 RECOMMENDED CABLE STRIPPING DIMENSIONS SCALE 3.000							
CUSTOMER OUTLINE DRAWING ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY							
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM (INCHES) AND TOLERANCES ARE: 0.5 - 6mm ±0.2mm 6 - 30mm ±0.4mm 30 - 120mm ± 0.6mm	MATERIAL		DRAWN C. McGRATH	DATE 21-Nov-00	TITLE N CLAMP SOLDER JACK FOR RG-58C/U, 58/U, 142A/U, 223/U CABLES		Amphenol Amphenol Corporation Communication and Network Products Division Danbury, CT U.S.A. 06810 SCALE: 2.0:1 SHEET 2 OF 2
	REFERENCE GEN# 34525-RFX_ASSY EAR 962370		ENGINEER O. BARTHELMES	DATE 21-Nov-00			
			APPROVED O. BARTHELMES	DATE 21-Nov-00			
			CAD FILE I:\N\35025-RFX	CODE ID 74868	DWG SIZE B	DRAWING NO. 35025-RFX	REV B