


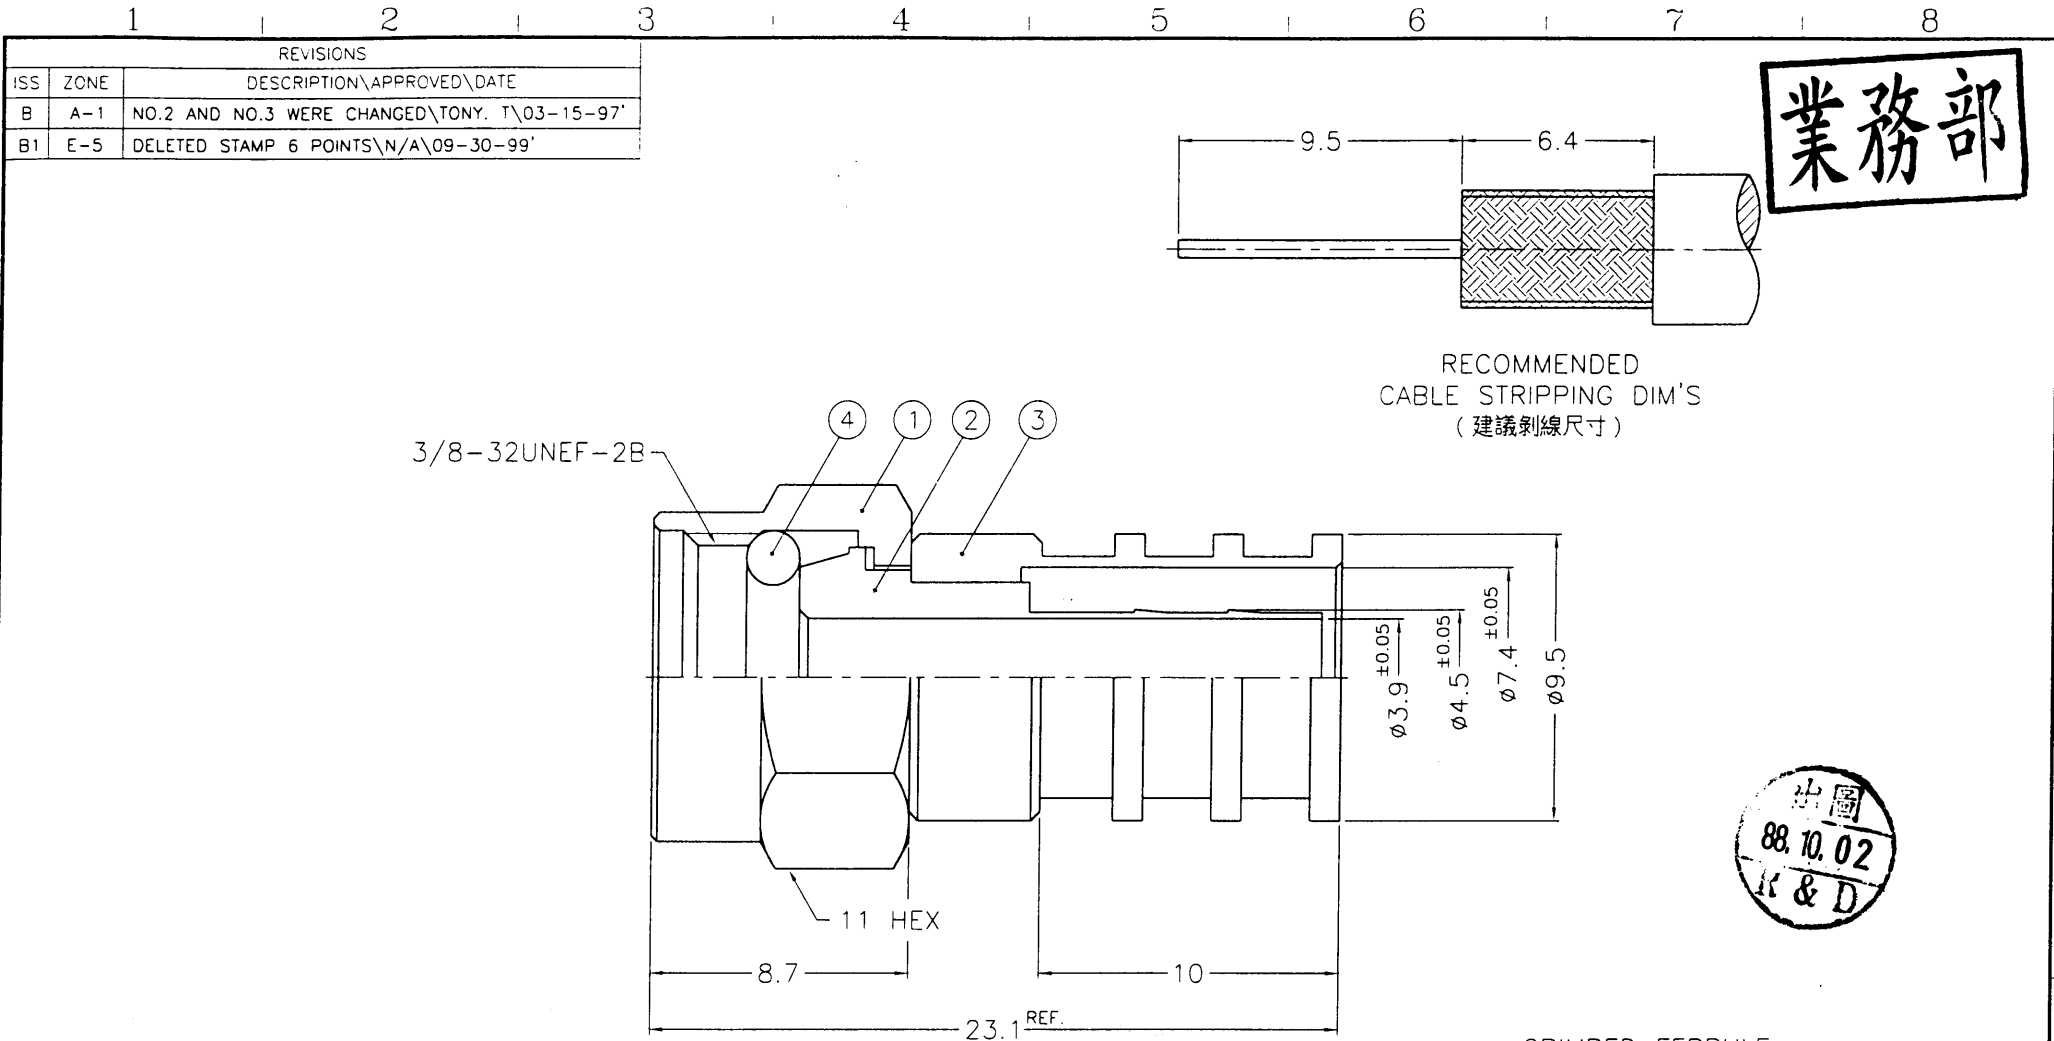

業務部

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剥線尺寸)

88.10.02
K & D

CRIMPED FERRULE
HEX CRIMP SIZE .324"

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. BRASS JIS H 3260, C 3501
3. NICKEL PL. 100 MIN. OVER COPPER STRIKE

DIMENSIONS ARE IN MILLIMETERS				PART NO.		Amphenol – Kai Jack TAINAN TAIWAN			
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED <i>Mark C</i> DATE 10-02-99'		TITLE F CONNECTOR			
				CHECKED <i>Gene W</i> DATE 10-02-99'					
				DRAWN <i>Betty L</i> DATE 10-02-99'		DRAWING NO. KJ-F1111M2-N-59U			
						FILE NO. F:\DWG\F\1111M2\59U\N			
				SCALE	4/1	ISSUE	B1		

8F-20204