

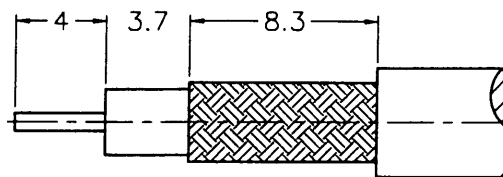
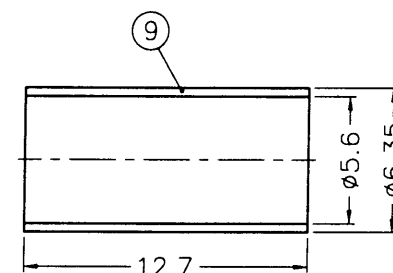


REVISIONS				
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE		
B	B-3	NO.8 WAS CHANGED\RD-DM91082201W\08-22-02'		

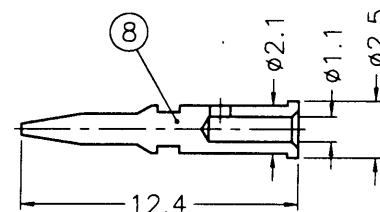

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

SALES

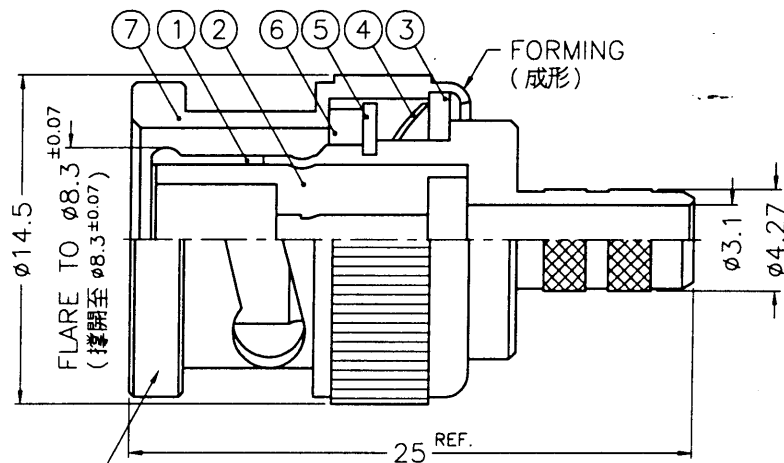

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. JIS H 3250, C 2600

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"



9	FERRULE	NOTE 6	NOTE 3	1	FR-635/56X127
8	CONTACT PIN	NOTE 1	NOTE 5	1	B50000-8-25/11
7	SHELL	NOTE 1	NOTE 3	1	B50000-1-B
6	GASKET	RUBBER	RED	1	GS-115/8X15
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
4	SPRING	SK5	NOTE 4	1	B50000-6
3	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
2	INSULATOR	DELIN	NATURAL	1	B50000-3-50-A
1	BODY	NOTE 1	NOTE 3	1	B50000-2-427/31
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 08-22-02'
CHECKED	DATE 08-22-02'
DRAWN	DATE 08-22-02'
FILE NO.	F:\DWG\B\1121A1\223U-50\ND3G

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	BNC CRIMP PLUG (FOR RG-55/U, 142A/U, 400/U, 223/U)
DRAWING NO.	KJ-B1121A1-ND3G-223U-50
ITEM NO.	011121AAA26ND5F

7RD-DR 15297 8