


Hardline

Feed Thru Connector

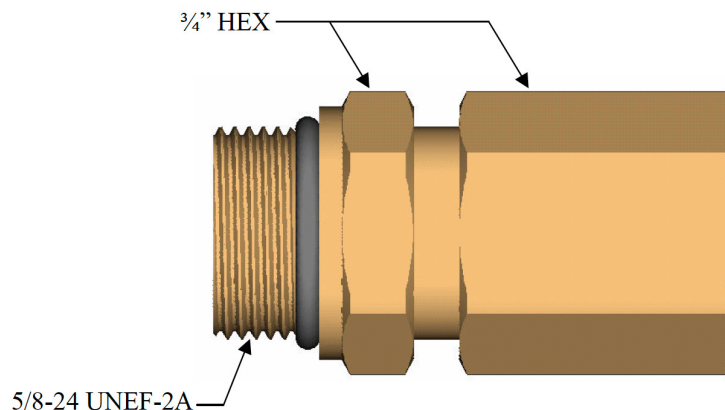

Specifications

Operation Specification

Specification	Value
Bandwidth	0 MHz to 1 GHz
Impedance	75 Ohms
Return Loss	Better than -30 dB to 1 GHz
Insertion Loss	Less than 0.10 dB to 1 GHz
Operating Voltage Rating	90 Volts (@ 60 Hz continuous AC)
Operating Temperature Range	-40° F to 140° F (-40° C to 60° C)

Tooling Requirements

- Two (2) 3/4 in wrenches
- Utility Knife
- Cable Cutters

Ordering Information

Part Number	Description
PF11	Feed Thru connector for RG11 to KS male

This product may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents

6176 E. Molloy Rd. East Syracuse, NY 13057 U.S.A. • customerservice@ppc-online.com • 1-800-800-6652 • +1 315-431-7200 • www.ppc-online.com