

# Terminators


## Locking and Basic

High reliability in a small package. The PST Drop Terminator incorporates a variety of enhancements allowing users to terminate, secure and disconnect a drop, while offering longevity sealing for both the tap port and the drop connector.

| Specifications                             |                                                           |
|--------------------------------------------|-----------------------------------------------------------|
| Return Loss                                | -30 dB to 3 GHz minimum                                   |
| Shielding Effectiveness                    | -120 dB minimum                                           |
| Corrosion Resistance                       | meets SCTE and Belcore per ATSM B117 (1000 hour salt fog) |
| Moisture Migration                         | Meets SCTE IPS-TP-013 (Red-dye moisture migration test)   |
| Specifications for insulated versions only |                                                           |
| Resistance (electrical)                    | 3.5E+13 Ohm                                               |
| Isolation Withstand                        | >5,000 (VDC or VAC)                                       |
| Meets or Exceeds all SCTE Specifications   |                                                           |



## Features & Benefits

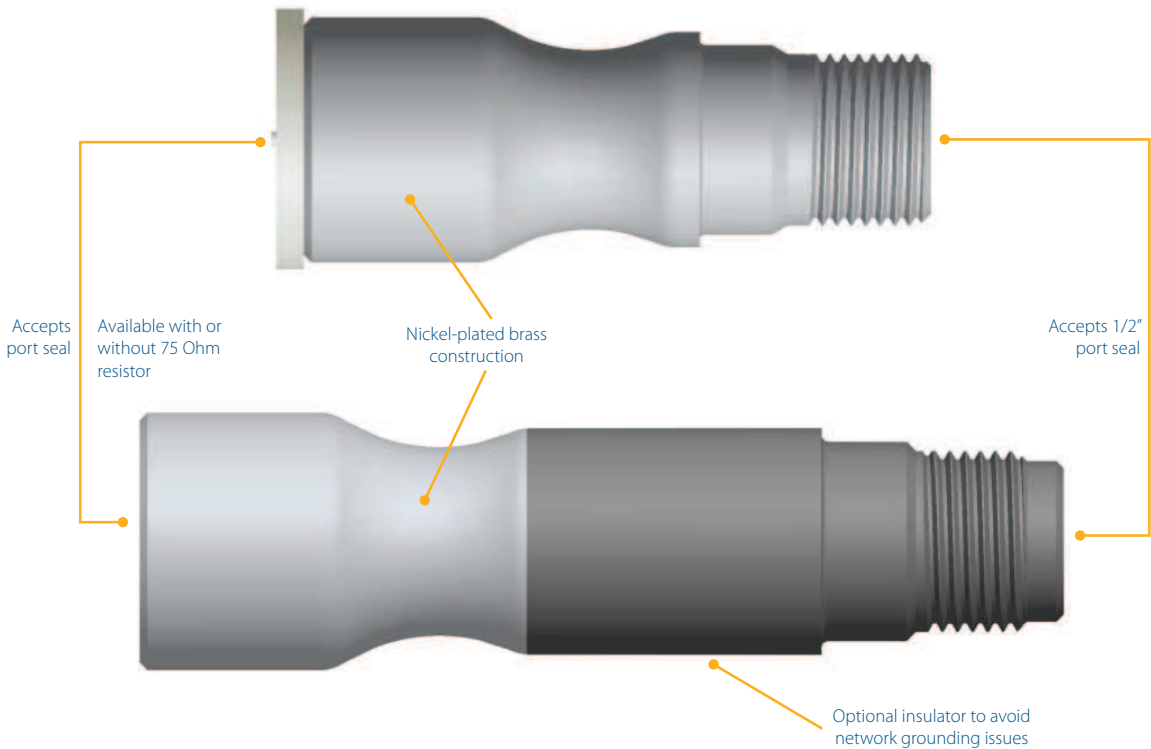

## Application



## Locking terminators with and without 75 Ohm resistor

PSTNR



PST75



PSTNRI



PST75I



### Part Numbers

|        |                                                            |
|--------|------------------------------------------------------------|
| PSTNR  | PST locking terminator, without 75 Ohm resistor            |
| PST75  | PST locking terminator, 75 Ohm resistor                    |
| PSTNRI | PST locking terminator, insulator, without 75 Ohm resistor |
| PST75I | PST locking terminator, insulator, 75 Ohm resistor         |

### Preparation & Installation Tools

|                          |      |      |         |        |
|--------------------------|------|------|---------|--------|
| Locking Terminator Tools | LTT4 | LTT7 | LTTV2/3 | LTT7TP |
|--------------------------|------|------|---------|--------|

## Basic terminators with and without 75 Ohm resistor

TR75S



TR75SS



TR75SSNR



### Part Numbers

|          |                                                                              |
|----------|------------------------------------------------------------------------------|
| TR75S    | Terminator, 75 Ohm resistor                                                  |
| TR75SS   | Swivel type, theft proof, 75 Ohm resistor, used with security sleeve         |
| TR75SSNR | Swivel type, theft proof, without 75 ohm resistor, used with security sleeve |