

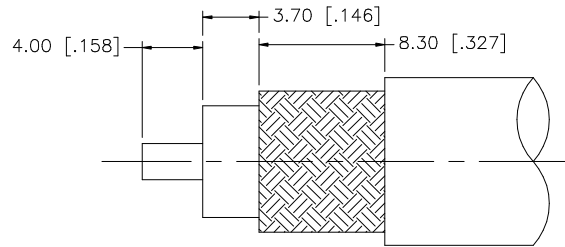
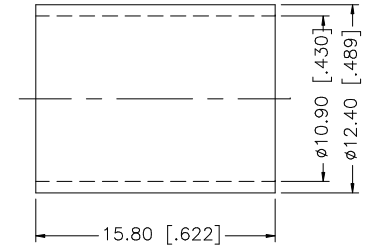


REV.	DATE	DESCRIPTION
A	01/15/04	UPDATE DRAWING FORMAT

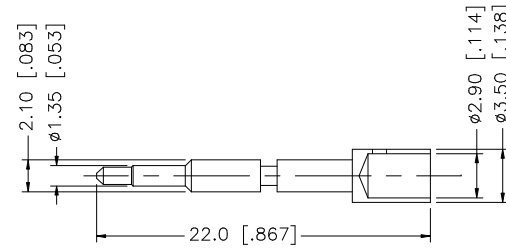

RECOMMENDED CABLE
STRIPPING DIMENSIONS

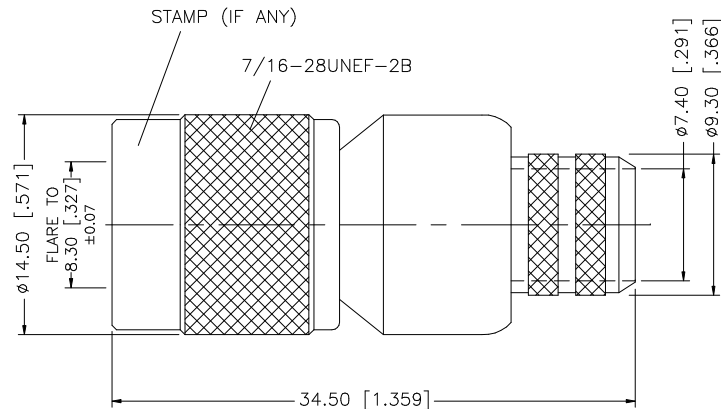

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CONTACT PIN TO SOLDER
OR .118" HEX CRIMP

9					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
8						DRAWN	G.R.S.						01/15/04
7						CHECKED			PART DESCRIPTION TNC CRIMP PLUG (FOR BELDEN 8214, 9913, 9914 CABLE)				
6						ISSUED							
5						SHEET	1 OF 1		PART NO. 122393				
4	FERRULE	COPPER	NICKEL	1									
3	CONTACT PIN	PHOS. BRONZE	GOLD	1				DWG. NO. 122393.DWG					
2	INSULATOR	TEFLON	NATURAL	1									REV. A
1	BODY	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE C:/122/122393.DWG						