


Hardline

KS Male Housing Terminator

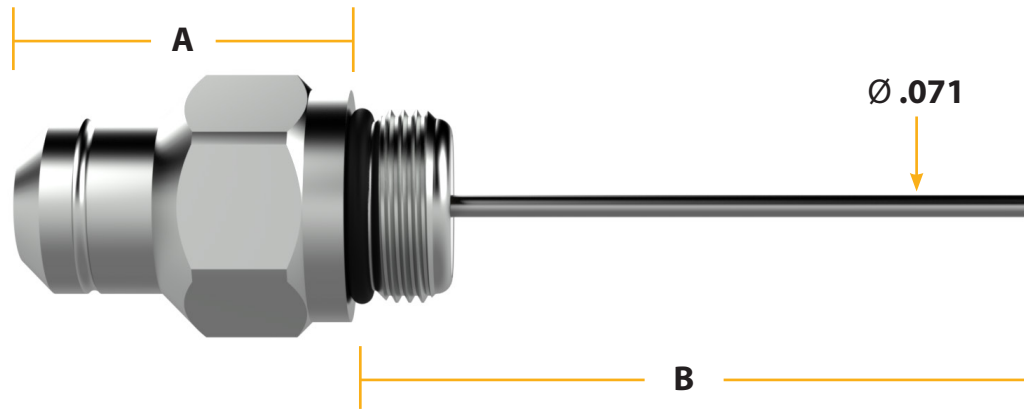

Mechanical Specifications

Connector	Hex Size	Terminator Length (A)	Inserted Length (B)	Thread Size	Surge Rating
	(inches)	(inches)	(inches)		(KV) At 60 Hz Continuous AC
UMTR	3/4	1.05	2.2	5/8-24 UNEF-2A	1
UMTRHV	3/4	1.05	2.2	5/8-24 UNEF-2A	2.5
UMTR6KV	3/4	1.05	2.2	5/8-24 UNEF-2A	6

Electrical Specifications

Bandwidth	5MHz to 3GHz
Impedance	75 Ohms (nominal)
Return Loss	-25dB from 5MHz to 1.794GHz
Operating Voltage	90 Volts (at 60 Hz continuous AC)
Operating Temperature	-40°F to + 140°F (-40°C to 60°C)

Meets or Exceeds all SCTE Specifications

Preparation & Installation Tools

Two (2) adjustable wrenches
Linemen's pliers or other appropriate cutters



These products may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents

6176 E. Molloy Rd. East Syracuse, NY 13057 U.S.A. • customerservice@ppc-online.com • 1-800-800-6652 • +1 315-431-7200 • www.ppc-online.com