

5

4

3

2

1

Description: 50 ohm BNC T Adapter

Part No: 27-8140

Application: Adapter

Crimp Tool: N/A

Impedance: 50 Ohms


Frequency Range: 0-4 GHz

Material:

Body	Brass	Nickel Plated
Contact	Brass	Gold Plated
Insulator	Derlin	
Crimp Sleeve	Brass	Nickel Plated
Coupling Nut	Zinc	Nickel Plated

RoHS Compliance: Yes

Technical Detail: Refer to Emerson Document P/N 27-0000

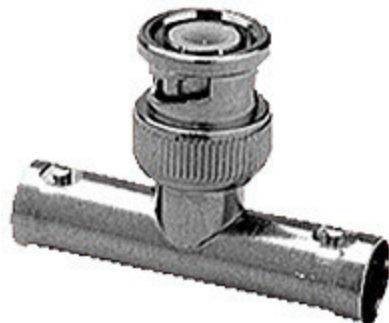

DRAWING NO.
27-8140-CUST

REVISIONS

OFFICAL RELEASE

01

08-25-09

T

W

B

Y

T


2009.09.08 09:28:58
Betty +08'00'

受控 CONTROLLED DOCUMENT

编号 P/N	27-8140-CUST	版本 Rev	01	日期 Rel'd Date	SEP 14,09
-----------	--------------	-----------	----	------------------	-----------



11.1
(.437in)



36.0 ±0.5
(1.417in ±.020)

Ø 9.5
(.374in)

DIM OUTLINE

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY TERRY.W	DATE 08-25-09
DECIMALS	mm	CHECKED BY TERRY.W	DATE 08-25-09
X	± 0.5	APPROVED BY THOMAS	DATE 08-25-09
X.X	± 0.3	U/M	mm
X.XX	± 0.1		
ANGLES	± 0.5°		

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

 Connectivity Solutions	
TITLE 50 OHM BNC T ADAPTER	
SHEET 1 OF 1	DRAWING NO. 27-8140-CUST
SIZE A	

CUSTOMER COPY