

5

4

3

2

1

D

C

B

A



Description: 50 Ohm BNC T adapter
Part No: 27-8141
Application: Adapter
Crimp Tool: N/A
Impedance: 50 Ohms
Frequency Range: 0-4 GHz
Material: Body Zinc Nickel plated
Contact Beryllium Gold plated
Insulator PE
RoHS Compliance: Yes
Technical Detail: Refer to Emerson Document P/N 27-0000

DRAWING NO.

27-8141-CUST

REVISIONS


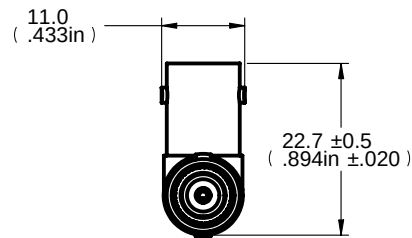
01	OFFICIAL RELEASE					
	03-11-09	J	J	T	T	
02	CHANGE INSULATOR MATERIAL FROM TPX TO PE					
	06-30-11	L	H	M		

D

C

B

A

DIM OUTLINE

CUSTOMER COPY

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS		mm	
X	± 0.5	Wencan Li	06-30-11
X.X	± 0.3	Hu Yuge	06-30-11
X.XX	± 0.1	Ma Lin	06-30-11
ANGLES	± 0.5°	U/M	mm

DATE

06-30-11

CHECKED BY

DATE

06-30-11

APPROVED BY

DATE

06-30-11

U/M

mm

THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.

Connectivity
Solutions

TITLE

50 OHM BNC T ADAPTER

SHEET
1 OF 1DRAWING NO.
27-8141-CUSTSIZE
A

5

4

3

2

1