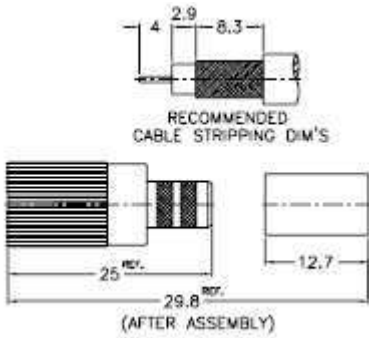
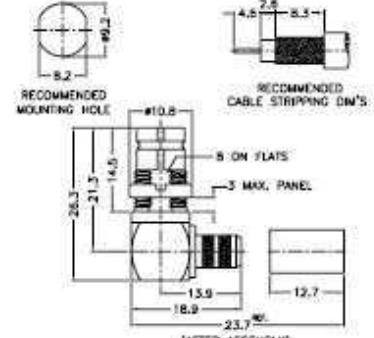
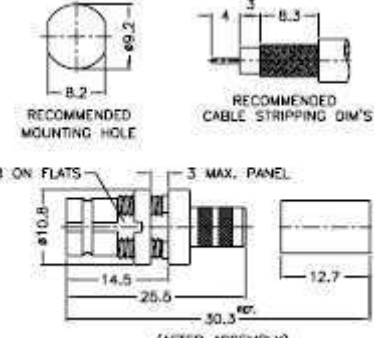





Amphenol




Telecom Solutions

1.6/5.6 Miniature 75 Ohm Coaxial Connectors

Materials	Electrical	Environmental
Body Parts (Male) – Brass – Nickel Finish Body Parts (Female) – Brass – Au/Ni Finish <u>Contacts</u> Outer MALE – P/B – Gold Finish Centre MALE – Brass – Gold Finish Centre FEMALE – p/b – Gold Finish Insulator – PTFE Crimp Ferrules* – Annealed Copper/Ni	Impedance – 75 ohm Frequency range – 0-1 GHz Voltage – 335 VRMS max sea-level Dielectric withstand – 1000 VRMS max sea-level VSWR Straight – 1.3 R/A – 1.5 Resistance Centre – 4 Milliohms max Outer – 2 Milliohms max Insulator – 1000 Megaohms min	Temp. range – -40°C thru 155°C Durability 500 cycles Related Information Cable – – Section D Hand Tools – Section F Termination Instr. – Section G Terminology – Section J

 Crimp/Crimp Straight Plug Termination Instruction E 1561121A1N3GT3Gxxx75	 Crimp/Crimp R/A Bulkhead Jack Termination Instruction E 1566412A1N3GT3Gxxx75	 Crimp/Crimp Straight Bulkhead Jack Termination Instruction E 1566421A1N3GT3Gxxx75
Part Number: 1561121A01RFX Description: RG/U: 59	Part Number: 1566412A01RFX Description: RG/U: 59	Part Number: 1566421A01RFX Description: RG/U: 59
Part Number: 1561121A02RFX Description: RG/U: 179	Part Number: 1566412A02RFX Description: RG/U: 179	Part Number: 1566421A02RFX Description: RG/U: 179
Part Number: 15692934 Description: L910/34, L910/39 BT3002	Part Number: 15666034 Description: L910/34, L910/39 BT3002	Part Number: 15693134 Description: L910/34, L910/39 BT3002

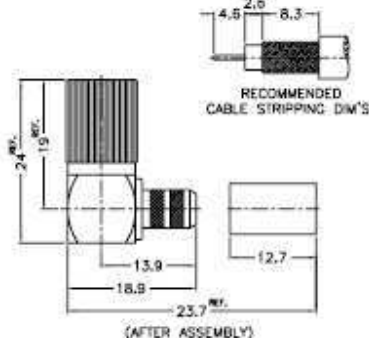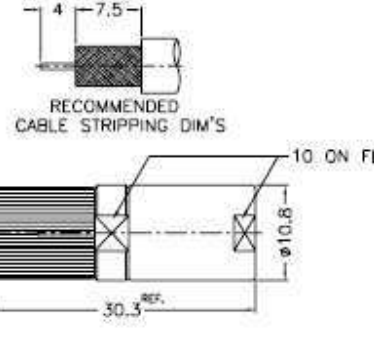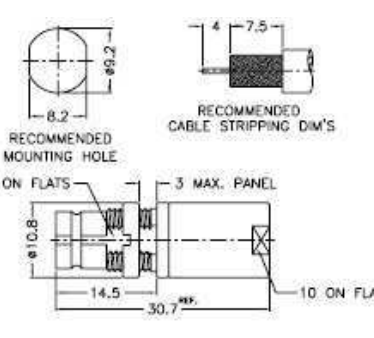 Crimp/Crimp Right Angle Plug Termination Instruction E 1561112A1N3GT3Gxxx75	 Clamp/Solder Straight Plug Termination Instruction Q 1561141A1N3GT3Gxxx75	 Clamp/Solder Straight Bulkhead Jack Termination Instruction Q 1566441A1N3GT3Gxxx75
Part Number: 1561112A01RFX Description: RG/U: 59	Part Number: 1561141A01RFX Description: RG/U: 59	Part Number: 1566441A01RFX Description: RG/U: 59
Part Number: 1561112A02RFX Description: RG/U: 179	Part Number: 1561141A02RFX Description: RG/U: 179	Part Number: 1566441A02RFX Description: RG/U: 179
Part Number: 15665734 Description: L910/34, L910/39 BT3002		

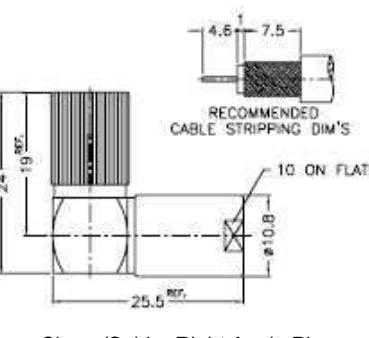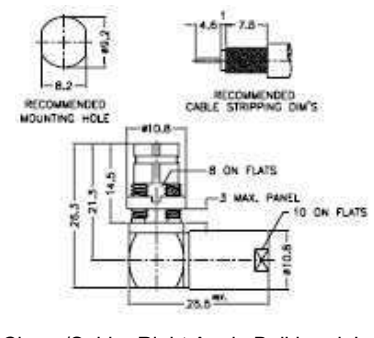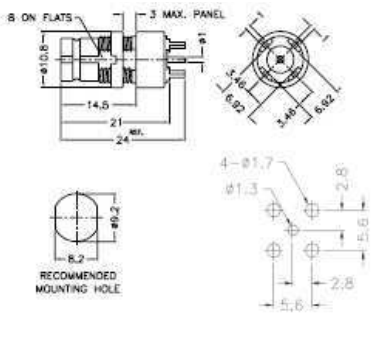
 Clamp/Solder Right Angle Plug Termination Instruction Q 1561142A1N3GT3Gxxx75	 Clamp/Solder Right Angle Bulkhead Jack Termination Instruction Q 1566442A1N3GT3Gxxx75	 Straight Bulkhead Jack for PCB 1566251M1N3GT3G75
Part Number: 1561142A01RFX Description: RG/U: 59	Part Number: 1566442A01RFX Description: RG/U: 59	Part Number: 1566251M01RFX Description: Gold Finish (Au)
Part Number: 1561142A02RFX Description: RG/U: 179	Part Number: 1566442A02RFX Description: RG/U: 179	

ARFA/RF

Amphenol


Telecom Solutions

1.6/5.6 Miniature 75 Ohm Coaxial Connectors – Continued

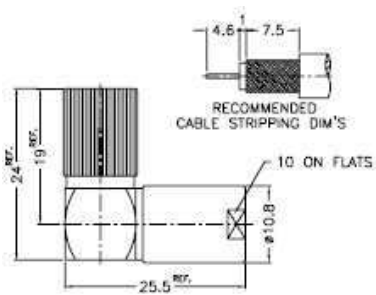


Clamp/Solder Right Angle Plug
Termination Instruction [Q](#)

1561142A1N3GT3Gxxx75

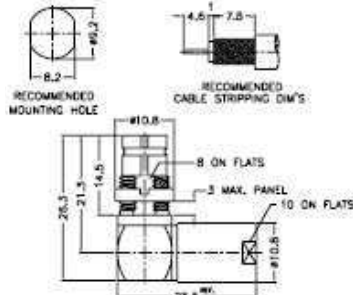

Clamp/Solder Right Angle Bulkhead Jack
Termination Instruction [Q](#)


1566442A1N3GT3Gxxx75

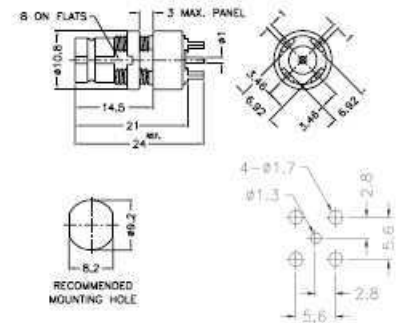

Straight Bulkhead Jack for PCB


1566252M1N3GT3G75

Part Number:	Description:	Part Number:	Description:	Part Number:	Description:
1561142A01RFX	RG/U: 59	1566442A01RFX	RG/U: 59	1566251M01RFX	Gold Finish (Au)
1561142A02RFX	RG/U: 179	1566442A02RFX	RG/U: 179		

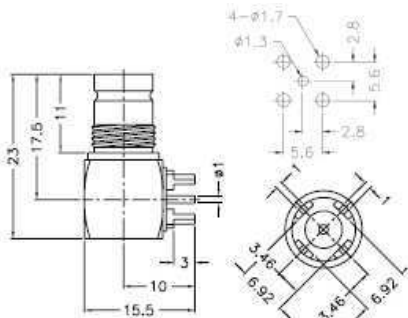


Right Angle Bulkhead Jack for PCB

1566252M1N3GT3G75



Plug to Plug Adapter


1562071A1N3GT3G75



Plug to Plug 'U' Link Adapter


1562076A1N3GT3G75

Part Number:	Description:	Part Number:	Description:	Part Number:	Description:
1566252M01RFX	Gold Finish (Au)	1562071A01RFX	Gold Finish (Au)	1562076A01RFX	Gold Finish (Au)

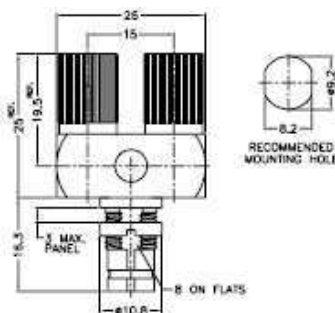


Plug to Jack to Plug 'Y' Link Adapter

1564077A1N3GT3G75

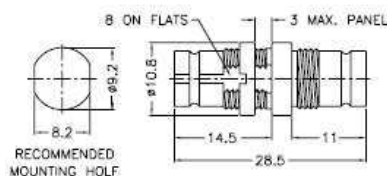

Jack to Jack Bulkhead Adapter

1567471A1N3GT3G75

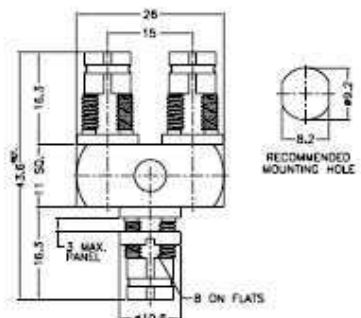

Jack to Jack to Jack 'Y' Link Adapter

1568077A1N3GT3G75

Part Number:	Description:	Part Number:	Description:	Part Number:	Description:
1564077A01RFX	Gold Finish (Au)	1567471A01RFX	Gold Finish (Au)	1568077A01RFX	Gold Finish (Au)

ARFA/RF